



High Temperature working range



High Temperature storage range

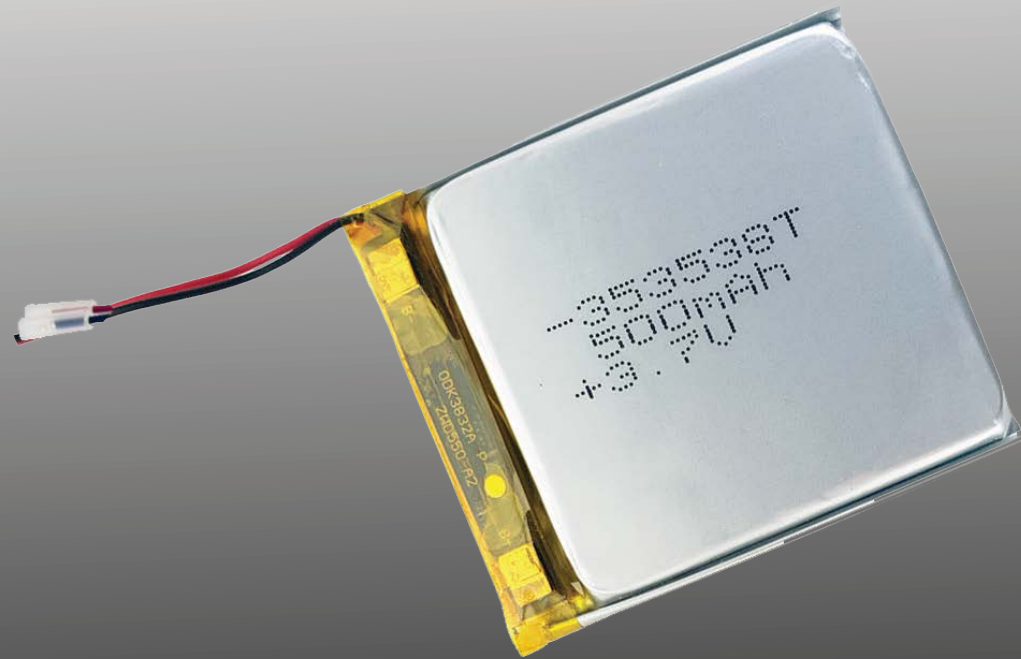

Actual Size

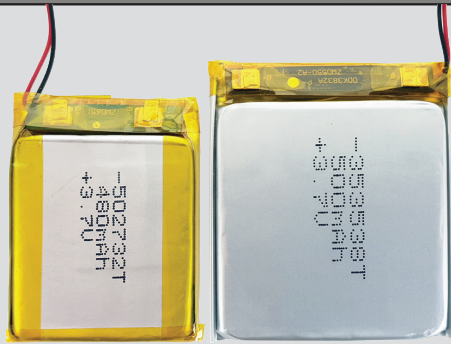

Premium Protected Industrial Li-Po Rechargeable Cell

Built-in internal protection board provides protection against overcharge, over discharge, overcurrent and short circuit. With the greatest safety standards for product integration and commercial use during normal and in case of fault conditions of your application.

For Your Product or Next Design. Easy Drop-in Integration



Network Security



Medical Devices



Internet of Things



Augmented/Virtual Reality



Artificial Intelligence



Industrial Applications

SPECIFICATIONS

Part Number	34295	34296
Battery Type	Li-ion Polymer Rechargeable High Temperature Battery	
Voltage	3V ~ 4.2V	
Min. Capacity	500mAh	480mAh
Max. Charging Current	350mA	336mA
Max. Discharge Current	750mA	720mA
Cycle Life	>500 (Fully charge and discharge)	
Dimensions	Cell (Max.)	5 x 27 x 32.5
(mm)	w/ PCM (Max.)	5 x 27 x 35
Operating Temperature	0 - 60°C	
Storage Temperature	-10 - 80°C	
Applications	Wearable devices, headset, etc.	